Opal
Wall Basin/Bath Mixer

Nero
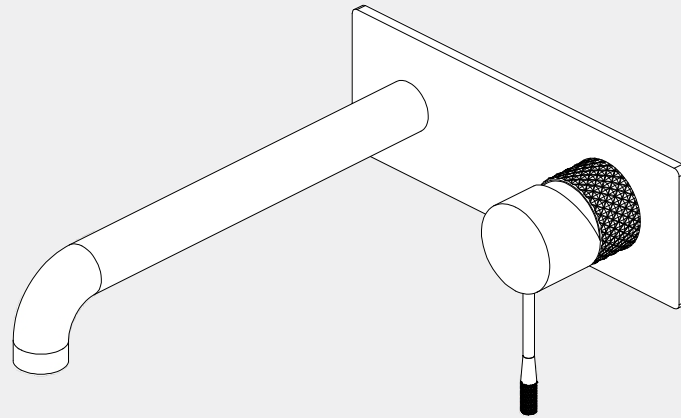
Versions:202401

Drawing
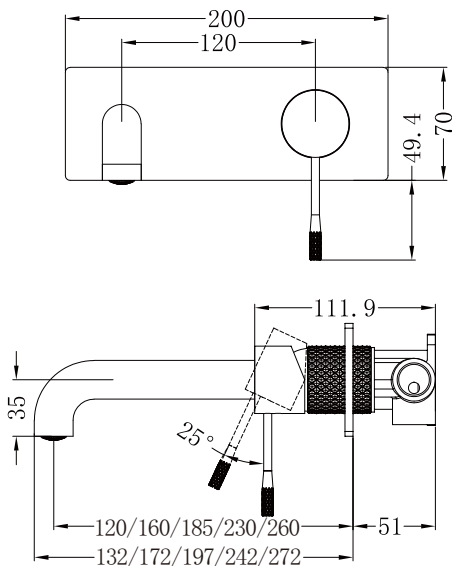
Specifications

Watermark License
WM-060073

Temperature Rating
Min 1˚C-Max 75˚C

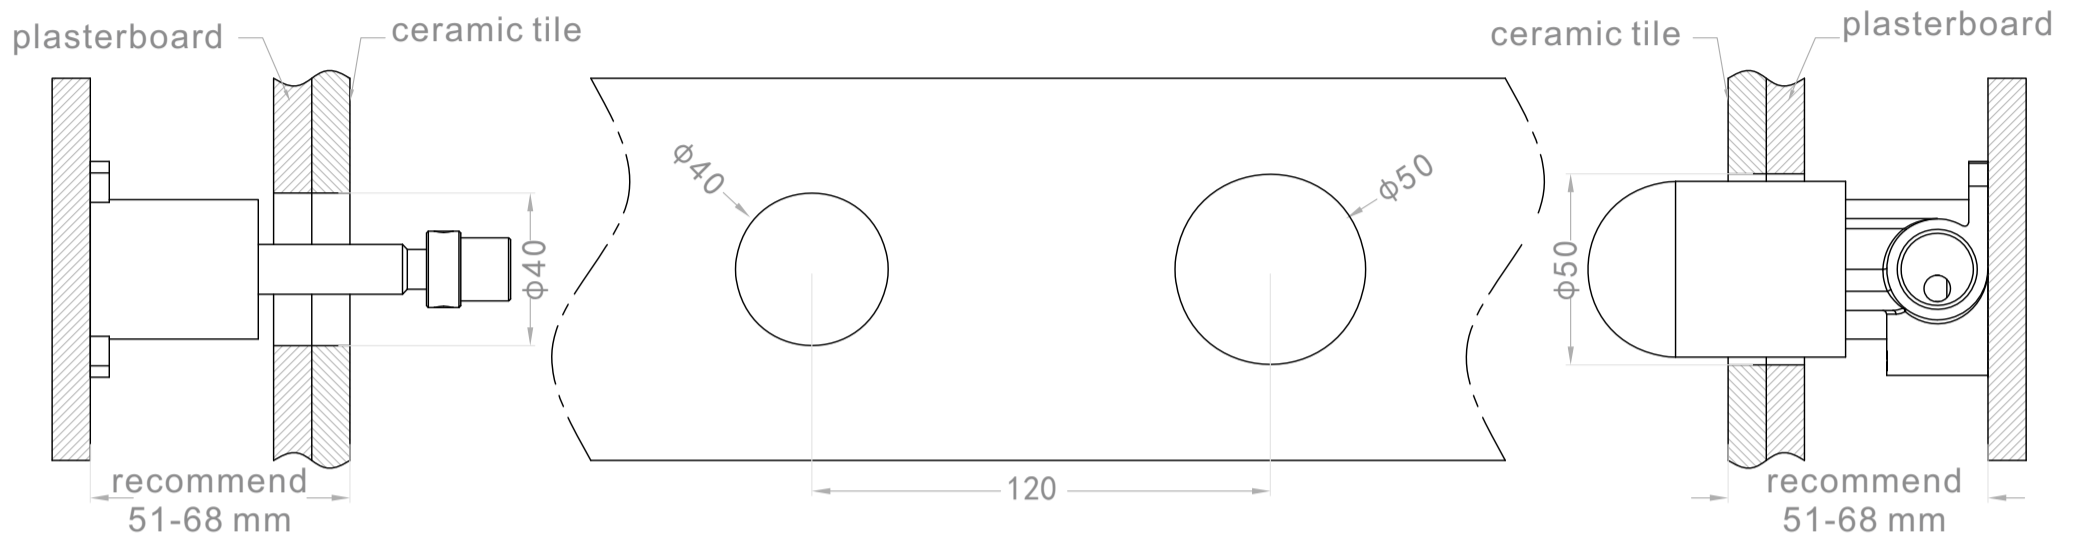**Pressure Rating**
Min 150kpa - Max 500kpa

Packaging Includes

1x Mixer Body
1x Handle
1x Spout
1x Plate
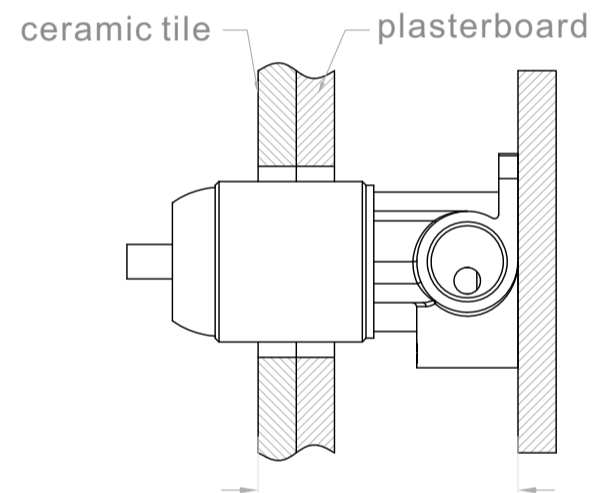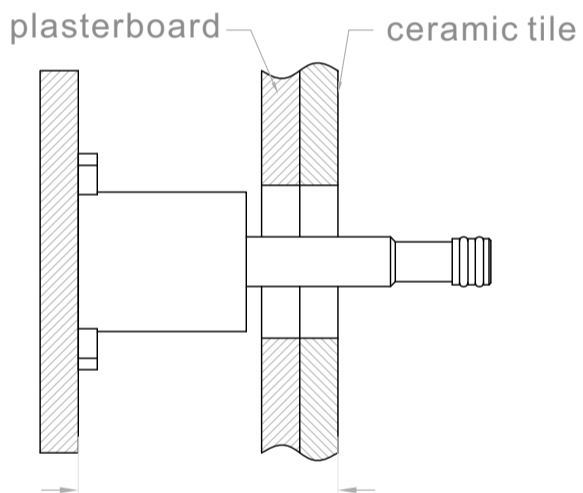1x Aerator Driver
1x None Restricted Aerator

Finish & SKU

Brushed Bronze
NR251907aBZ
NR251907a(120/160/230/260)BZ

Graphite
NR251907aGR
NR251907a(120/160/230/260)GR

Brushed Gold
NR251907aBG
NR251907a(120/160/230/260)BG

Brushed Nickel
NR251907aBN
NR251907a(120/160/230/260)BN

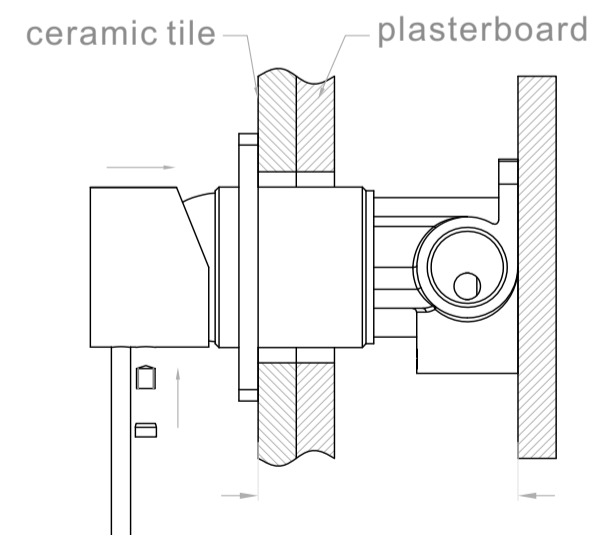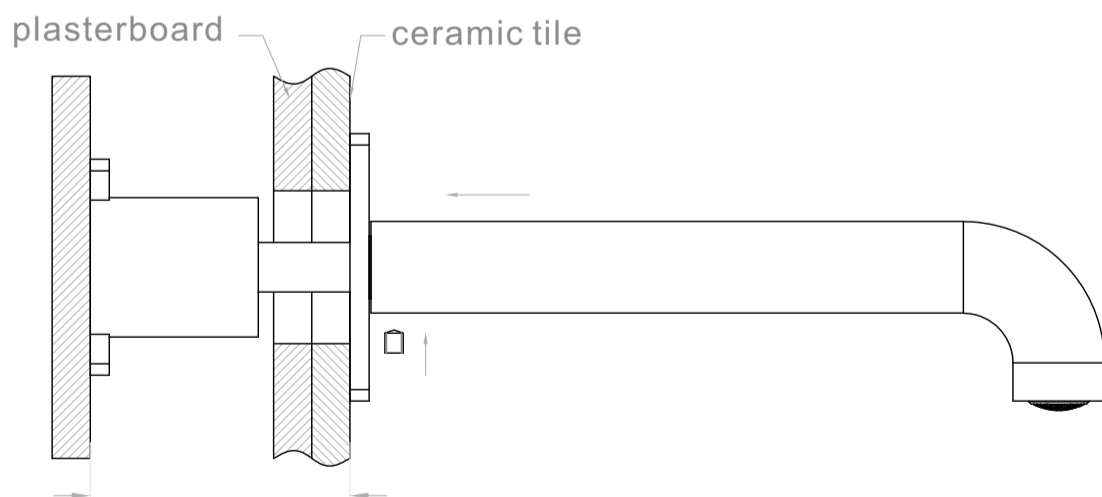*Dimensions are nominal measurements only.

Installation Instruction

plasterboard   ceramic tile

Φ40

recommend
51-68 mm

ceramic tile   plasterboard

Φ40   Φ50

120

Φ50

recommend
51-68 mm

1. Fix body on noggin and ensure installation depth is 51-68mm from noggin to ceramic tile.
2.Connect cold water hose and hot water hose and conduct water pressure test for leakage.
3.Install plasterboard and ceramic tile after drilling a φ50 and a φ40 hole according to above picture.

plasterboard   ceramic tile

ceramic tile   plasterboard

4. Remove the plastic sleeve, grub screw and water testing plug.

plasterboard   ceramic tile

ceramic tile   plasterboard

5.Install washer, plate, spout and handle.

Nero

WATER RATING
www.waterrating.gov.au
6.0 litres per minute
In accordance with AS/NZS 6400
Licence No. I 225
YINSHENGWANG SANITARY
WARE LIMITED COMPANY

15 YEARS WARRANTY
15
15 YEARS WARRANTY